


IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Andrew THOMAS,)
 et al.)
Serial No.: Not yet assigned)
Filed: Concurrently herewith) Our Ref: B-4412 619362-3
For: "SOUND LINKS") Date: December 4, 2001



CLAIM TO PRIORITY UNDER 35 U.S.C. 119

Commissioner of Patents and Trademarks
Box New Patent Application
Washington, D.C. 20231

Sir:

- [X] Applicants hereby make a right of priority claim under 35 U.S.C. 119 for the benefit of the filing date(s) of the following corresponding foreign application(s):

<u>COUNTRY</u>	<u>FILING DATE</u>	<u>SERIAL NUMBER</u>
Great Britain	7 December 2000	0029799.4

- [] A certified copy of each of the above-noted patent applications was filed with the Parent Application No. _____.
- [X] To support applicants' claim, a certified copy of the above-identified foreign patent application is enclosed herewith.
- [] The priority document will be forwarded to the Patent Office when required or prior to issuance.

Respectfully submitted,

Richard P. Berg
Attorney for Applicant
Reg. No. 28,145

LADAS & PARRY
5670 Wilshire Boulevard
Suite 2100
Los Angeles, CA 90036
Telephone: (323) 934-2300
Telefax: (323) 934-0202

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)



EL741832532US



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

J1017 U.S. PTO
10/005379

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.



In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 15 October 2001

THIS PAGE BLANK (USPTO)

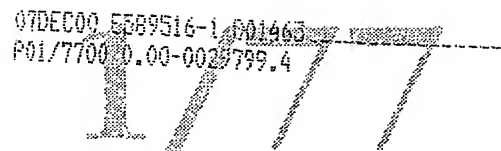

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

07 DEC 2000

1. Your reference

30010689 GB

2. Patent application number

(The Patent Office will fill in this part)

0029799.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Hewlett-Packard Company
3000 Hanover Street
Palo Alto
CA 94304, USA

Patents ADP number (*if you know it*)

Delaware, USA

If the applicant is a corporate body, give the country/state of its incorporation

00496589001

4. Title of the invention **Sound links**

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Robert F Squibbs
Hewlett-Packard Ltd, IP Section
Filton Road
Stoke Gifford
Bristol BS34 8QZ

Patents ADP number (*if you know it*)

07563083001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

8

Claim(s)

2

Abstract

1

Drawing(s)

4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

fee sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

R. F. Squibbs
Robert Francis Squibbs

Date

6 December 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

K Nommeots-Nomm

Tel: 0117-312-9947

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
b) Write your answers in capital letters using black ink or you may type them.
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
e) Once you have filled in the form you must remember to sign and date it.
f) For details of the fee and ways to pay please contact the Patent Office.

Sound Links

Field of the Invention

- 5 The present invention relates to a method and arrangement for accessing a content site using information encoded sound signals.

Background of the Invention

- 10 In recent years there has been an explosion in the number of services available over the World Wide Web on the public internet (generally referred to as the "web"), the web being composed of a myriad of pages linked together by hyperlinks and delivered by servers on request using the HTTP protocol. Each page comprises content marked up with tags to enable the receiving application (typically a GUI browser) to render the page content in the manner intended by the page author; the markup language used for standard web pages is
- 15 HTML (HyperText Markup Language).

- However, today far more people have access to a telephone than have access to a computer with an Internet connection. Sales of cellphones are outstripping PC sales so that many people have already or soon will have a phone within reach where ever they go. As a result,
- 20 there is increasing interest in being able to access web-based services from phones. 'Voice Browsers' offer the promise of allowing everyone to access web-based services from any phone, making it practical to access the Web any time and any where, whether at home, on the move, or at work.

- 25 Indeed, because many items around the home and office have a sound capability, it is attractive to use sound, not only for passing information to / from / between humans, but also for passing functional information such as URLs, to and between items of equipment. JP 11-119974 (Sony) describes various ways of using sound URLs, these being DTMF sound sequences that decode to character URLs.

30

A disadvantage of audible sound URLs is that they are generally highly unattractive to humans as they possess a fairly random structure of sound (or so it appears to the human

ear). Whilst it is possible to hide sound data such as URLs in other, pleasanter sounds using sound watermarking techniques, this generally requires complex embedding and retrieval systems which is expensive.

- 5 It is an object of the present invention to provide improved sound URLs and methods for their usage.

Summary of the Invention

- According to one aspect of the present invention, there is provided a method of accessing a content site comprising the steps of:
- 10 (a) - receiving a sound sequence in which are encoded characters according to a predetermined scheme;
- (b) - decoding the received sound URL to derive a character sequence;
- (c) - where the character sequence includes a site code for translation by a service system
- 15 into a content site URL, sending the site code to the service system for translation; and
- (d) - receiving back from the service system the content site URL corresponding to said site code, and using it to access the content site.
- 20 The present invention also encompasses an arrangement for implementing the foregoing method.

Brief Description of the Drawings

- 25 A method and arrangement embodying the invention, for accessing content sites, will now be described, by way of non-limiting example, with reference to the accompanying diagrammatic drawings, in which:
- . **Figure 1** is a block diagram showing the main functional blocks of a tone URL translator;
- 30 . **Figure 2** is a diagram illustrating the mapping between tones and characters for a first tone-URL encoding/decoding scheme;

- . **Figure 3** is a diagram illustrating the mapping between tones and characters for a second tone-URL encoding/decoding scheme;
- . **Figure 4** is a diagram illustrating a preferred conversion scheme between characters and sound codewords;
- 5 . **Figure 5** is a diagram showing the use of a service system to translate site codes to site URLs; and
- . **Figure 6** is a diagram showing the use of the Figure 5 service system by a network voice browser.

10

Best Mode of Carrying Out the Invention

Figure 1 depicts a tone URL translator 1 for receiving a sequence of tones that encode the characters of an URL. The tones are received as sound through microphone 2 but may also
 15 be received in analogue or digital electrical signal form. A converter 3 converts the received tone signals into a common internal format before passing the tone signals to a unit 4 that determines the frequencies of the received tones and generates corresponding respective tone codewords. These sound codewords are supplied to unit 5 where they are converted into a URL character string according to a predetermined mapping process.

20

Figure 2 shows a first mapping scheme for converting between tones and character codes. In this example, there is a one-to-one correspondence between tones and character codes—that is, each tone maps to one character code. In Figure 2, the left-hand column shows the set of available tones 6 in increasing order of frequency, the center column corresponds to
 25 the set of tone codewords 7 arranged in increasing codeword value, and the right-hand column is the set of character codes in standard order (for example, the ASCII character code set arranged in increasing order of binary value).

Moving from a tone to a character code (or vice versa) involves two mappings, namely a
 30 first mapping 9A between tone and tone codeword, and a second mapping 9B between tone codeword and character code. The overall mapping between tones and character codes is a combination of the two mappings 9A and 9B. In the Figure 2 example, both mappings 9A

and 9B are simple one-to-one mappings with the values on each side of the mappings both increasing /decreasing as the sets 6,7 and 8 are progressed through.

Implementing the Figure 2 scheme using the Figure 1 translator involves the unit 4 carrying out the mapping 9A and unit 5 carrying out the mapping 9B. It will be appreciated that the encoding process by which URL characters are converted to tone sequences is the reverse of the decoding process carried by translator 1 and can be effected by appropriate apparatus.

Whilst the foregoing mapping of Figure 2 is extremely simple and therefore easy to implement, it suffers from the disadvantage that the sequence of tones produced when any particular URL is encoded, is likely to be unpleasant to the human ear.

To alleviate this, a modified mapping is used, one example modified mapping being illustrated in Figure 3. In this example, the mapping 9A between tones and tone codewords is modified such that the overall mapping between tones and character codes results in frequently used character combinations of URLs producing pleasant sound sequences (that is, sequences of a musical character where “musical” is to be understood broadly, including chimes and the like). The character combinations so encoded are, for example, the generic top level domain names and “www”.

The mapping 9B could alternatively or additionally have been modified to produce the desired musical sequences.

It is also possible to choose a mapping that gives a musical sequence for a complete URL.

In the foregoing encoding/decoding schemes, there is a one-to-one correspondence between tones and character codes and, as a consequence, it is possible to omit one of the mappings 9A / 9B and have tones mapping directly to character codes. However, using intermediate tone codewords gives a degree of flexibility permitting improved encoding.

More particularly, if the character set has 256 characters, then producing 256 tones within the frequency band of a telephone voice circuit (over which it may be desired to pass sound URLs), means that the resultant tones are very close together. It is preferable to have a smaller number of tones – for example 64 tones. However, to efficiently code characters in this case requires that each group of three characters is encoded by four tones. How this can be conveniently done is illustrated in Figure 4 where each of three characters is represented by an 8-bit code. These codes are concatenated to form an intermediate 24-bit word 50. Word 50 is then split into four 6-bit tone codewords; the 6 bits permit 64 possible tone codewords which therefore provide an efficient representation of the 64 tones.

10

Figure 4 represents a four-to-three mapping between tone codewords and character codes (mapping 9B), the mapping 9A between tones and tone codewords remaining a one-to-one in this example (though this can be varied). With this encoding scheme, it is more complicated to determine the details of the mapping (for example, mapping 9A) required to generate pleasant tone sequences for particular character groups since the characters must be considered in groups of three. However, since the main target character groups (generic top level domain names) are three-character groups and since leading spaces can be used to ensure that each such group is taken as a whole during the encoding process, determining a mapping for producing pleasant sounds for a small set of character combinations is a manageable task.

20

Figure 5 shows an arrangement which also enables pleasant tone sequences to be used to pass URLs; as will be seen, this arrangement preferably, but not necessarily, makes use of tone-character mappings such as depicted in Figure 3 which associate pleasant tone sequences with common character sequences.

25

More particularly, end-user equipment 10 has a web browser 11 which can be used to contact web sites over the internet 20. Equipment 10 is provided with a sound input microphone 13 for receiving sound sequences 12 which represent, or can be used to obtain, website URLs. The sound sequences are constituted by tone sequences representing characters according to mappings such as illustrated in Figure 2, 3 and 4. The sound sequence signals from microphone 13 are passed to translator 14, which is similar in form

30

to translator 1 of Figure 1, and the resultant character sequences are fed to a discriminator unit 15. The role of this unit 15 is to determine whether a received character sequence represents a general URL (in which case it is passed to browser 11 for use in accessing the corresponding website), or whether it represents a site code intended to be translated into a URL; in the present example, service system 25 with URL "mapmusic.com" provides such a translation service.

The sound sequence 12 depicted in Figure 5 corresponds to the input of a site code. The sound sequence is made up of four segments, namely a "start" segment 12A which can be a special character sequence indicating the start of a sequence, a sound segment 12B that encodes characters indicating that a site code is being provided, a sound segment 12C encoding the site code itself, and a stop segment indicating the end of the sequence 12. The start and stop codes would typically also be used to delimit a tone sequence directly encoding a URL.

When the discriminator sees the characters indicative of a site code, it knows that the next set of characters constitutes the site code and this code requires translation into a URL. The indicator characters can, in fact, be the URL of the translation service system – in this example "mapmusic.com".

The discriminator 15 next passes the site code to unit 16 which proceeds to contact service system 25 over the internet 20 (see arrow 22), passing it the site code 18. A map-site-code block 26 at service system 25 does a simple database lookup in database 28 to convert the site code into the corresponding site URL which it then returns to the unit 16 (see arrow 23). Unit 23 then passes the URL to browser 11 which uses it to contact the website concerned - in this case, website 40.

The Figure 5 arrangement permits the use of site codes chosen because they sound pleasant when encoded into sound, the corresponding code characters being of little relevance provided they are unique. Furthermore, if the mapping used in the encoding scheme has been selected such that both the start and stop segments, as well as the "mapmusic.com"

URL all have pleasant sounds, then the sound sequence 12 will be acceptable to the human ear regardless of the site being pointed to.

Figure 6 shows a variation of the Figure 5 arrangement in which the functionality of equipment 10 is incorporated into a voice browser 33 located in the communications infrastructure (for example, provided by a PSTN or PLMN operator or by an ISP). A voice browser allows people to access the Web using speech and is interposed between a user 32 and a voice page server 60. This server 60 holds voice service pages (text pages) that are marked-up with tags of a voice-related markup language (or languages). When a page is requested by the user 32, it is interpreted at a top level (dialog level) by a dialog manager 37 of the voice browser 33 and output intended for the user is passed in text form to a Text-To-Speech (TTS) converter 36 which provides appropriate voice output to the user. User voice input is converted to text by speech recognition module 35 of the voice browser 33 and the dialog manager 37 determines what action is to be taken according to the received input and the directions in the original page. Whatever its precise form, the voice browser can be located at any point between the user and the voice page server; in the present case, it is shown as located in the communications infrastructure.

The sound channel between the user's equipment 31 (for example, a mobile phone) and the voice browser 33 permits a tone-encoded character sequence be passed to the browser. This tone sequence is intercepted by unit 38 and passed to functionality corresponding to units 14, 15 and 16 in Figure 5. If the tone sequence includes a general URL this is passed to the browser for action, whereas if the tone sequence includes a site code, the service system is accessed to determine the corresponding URL, the latter being returned and passed to the browser.

In both the arrangements of Figures 5 and 6, the unit 16 preferably includes a cache which is used to store the site codes and their corresponding URLs received back from the service system 25. In this case, before the unit 16 accesses service system to get a translation of a newly-received site code, it first checks its cache to see if it already has the required URL in cache – if it does, the URL is passed to the browser without the service system being accessed.

Many variants are, of course, possible to the arrangements described above. For example, whilst the sound features used to represent the codewords 7 have been tones in the foregoing examples, the codewords could be used to produce a different type of sound feature, such as:

- tone combinations;
- occurrence of maximum sound output power in predetermined frequency bands;
- changes in output frequency;
- 10 - different modulation frequencies of one or more tones.

Furthermore, the sound features can occur not only sequentially as described, but also in overlapping relation provided that it remains possible to determine character sequencing on decoding of the sound URL.

CLAIMS

1. A method of accessing a content site comprising the steps of:
 - 5 (a) - receiving a sound sequence in which are encoded characters according to a predetermined scheme;
 - (b) - decoding the received sound URL to derive a character sequence;
 - (c) - where the character sequence includes a site code for translation by a service system into a content site URL, sending the site code to the service system for translation;
 - 10 and
 - (d) - receiving back from the service system the content site URL corresponding to said site code, and using it to access the content site.
2. A method according to claim 1, wherein the character sequence includes the URL of the
15 service system.
3. A method according to claim 1, wherein the character sequence includes two groups of characters, one of which constitutes said site code and the other of which serves to indicate that the site code is to be translated by said service system into an content site URL.
20
4. A method according to claim 3, wherein the said other group of characters comprises the URL of the service system.
5. A method according to claim 3 or claim 4, wherein the nature of the sound features and
25 of the overall mapping between sound features and characters is such that a sound sequence of a musical character represents said one group of characters.
6. A method according to any one of claims 3 to 5, wherein the nature of the sound features and of the overall mapping between sound features and characters is such that a
30 sound sequence of a musical character represents said other group of characters.
7. A method according to any one of the preceding claims, wherein said sound sequence

comprises sound features that in step (b) are decoded into corresponding sound codewords which are then mapped to characters.

8. A method according to claim 7, wherein the sound features comprise one of:
- 5 - fixed-frequency tones or tone combinations;
 - occurrence of maximum sound output power in predetermined frequency bands;
 - changes in output frequency;
 - different modulation frequencies of one or more tones.
- 10 9. A method according to claim 7, wherein step (b) involves taking groups of a first number of the sound codewords and using each group to form a second number of characters, said second number being different from said first number.
10. A method according to claim 9, wherein four six-bit sound codewords are used to form
- 15 three characters each represented by eight bits.
11. A method according to any one of the preceding claims, wherein the steps of the method are carried out by a voice browser.
- 20 12. A method according to any one of the preceding claims, including the further step of caching the correspondence of site code to site URL, step (c) involving checking this cache before contacting the service system.

ABSTRACT**Sound Links**

5

A browser (11) with a sound input receives a sound sequence (12) that can be used to access a content site (40). The sound sequence encodes characters according to a predetermined scheme. These characters are extracted by the browser (11) and may either directly constitute the URL of the content site, or include a site code (18) that can be translated into the content site URL by a service system (25). In this latter case, the browser (11) contacts the service system (25) to have the site code translated into the content site URL. Once in possession of the content site URL, the browser (11) contacts that site (40). Where the encoded characters represent a site code requiring translation, the URL of the translation service system (25) is preferably included in the set of encoded characters with the encoding being such that the URL encodes to a musical tune.

(Fig. 5)

20

THIS PAGE BLANK (USPTO)

1 / 4

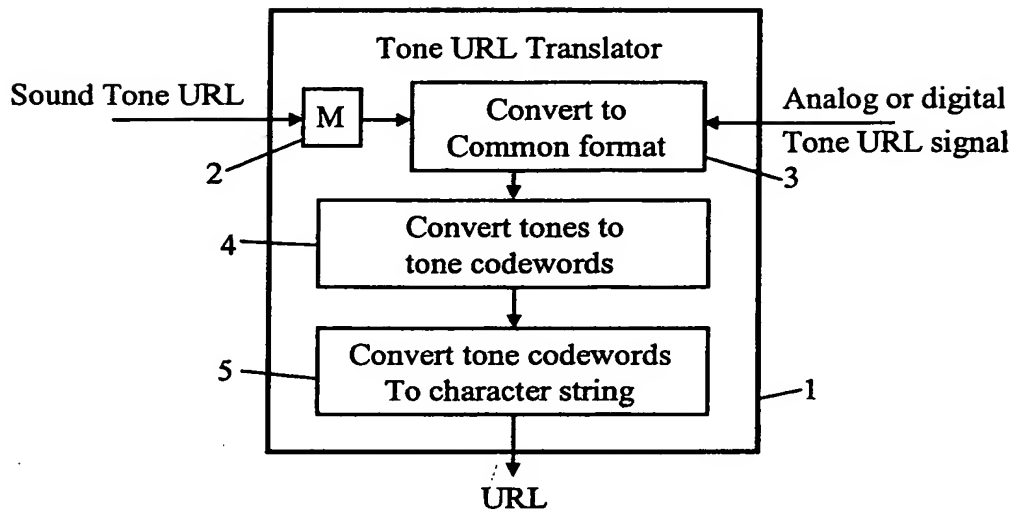


Figure 1

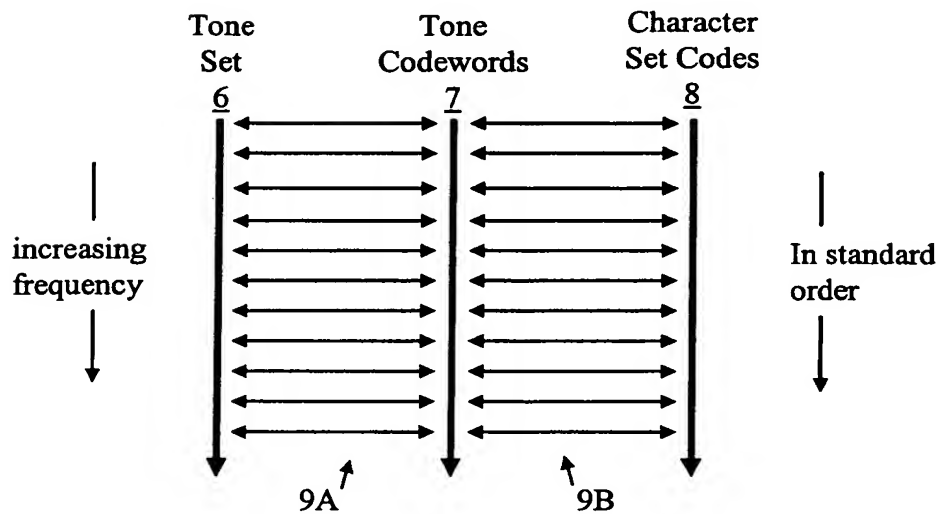


Figure 2



THIS PAGE BLANK (USPTO)

2/4

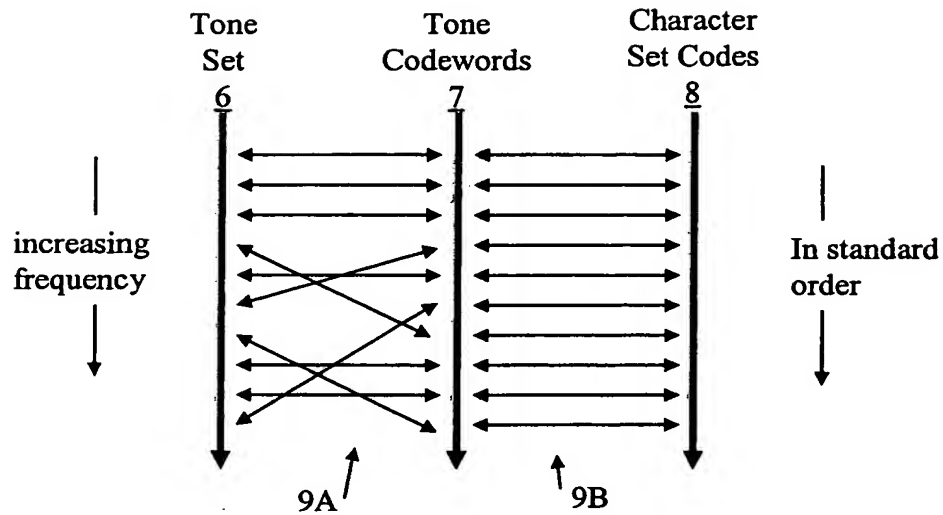


Figure 3


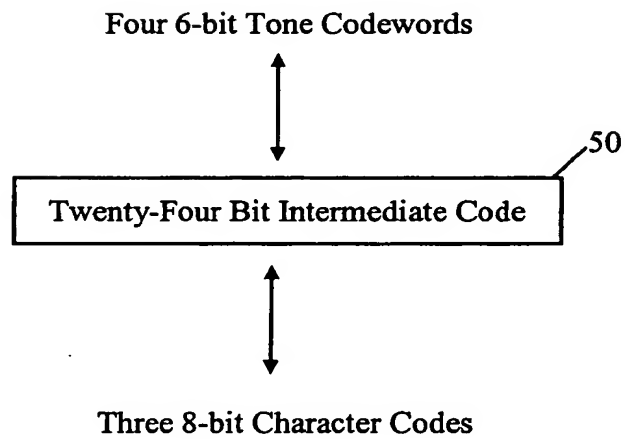


Figure 4

THIS PAGE BLANK (USPTO)

Figure 5

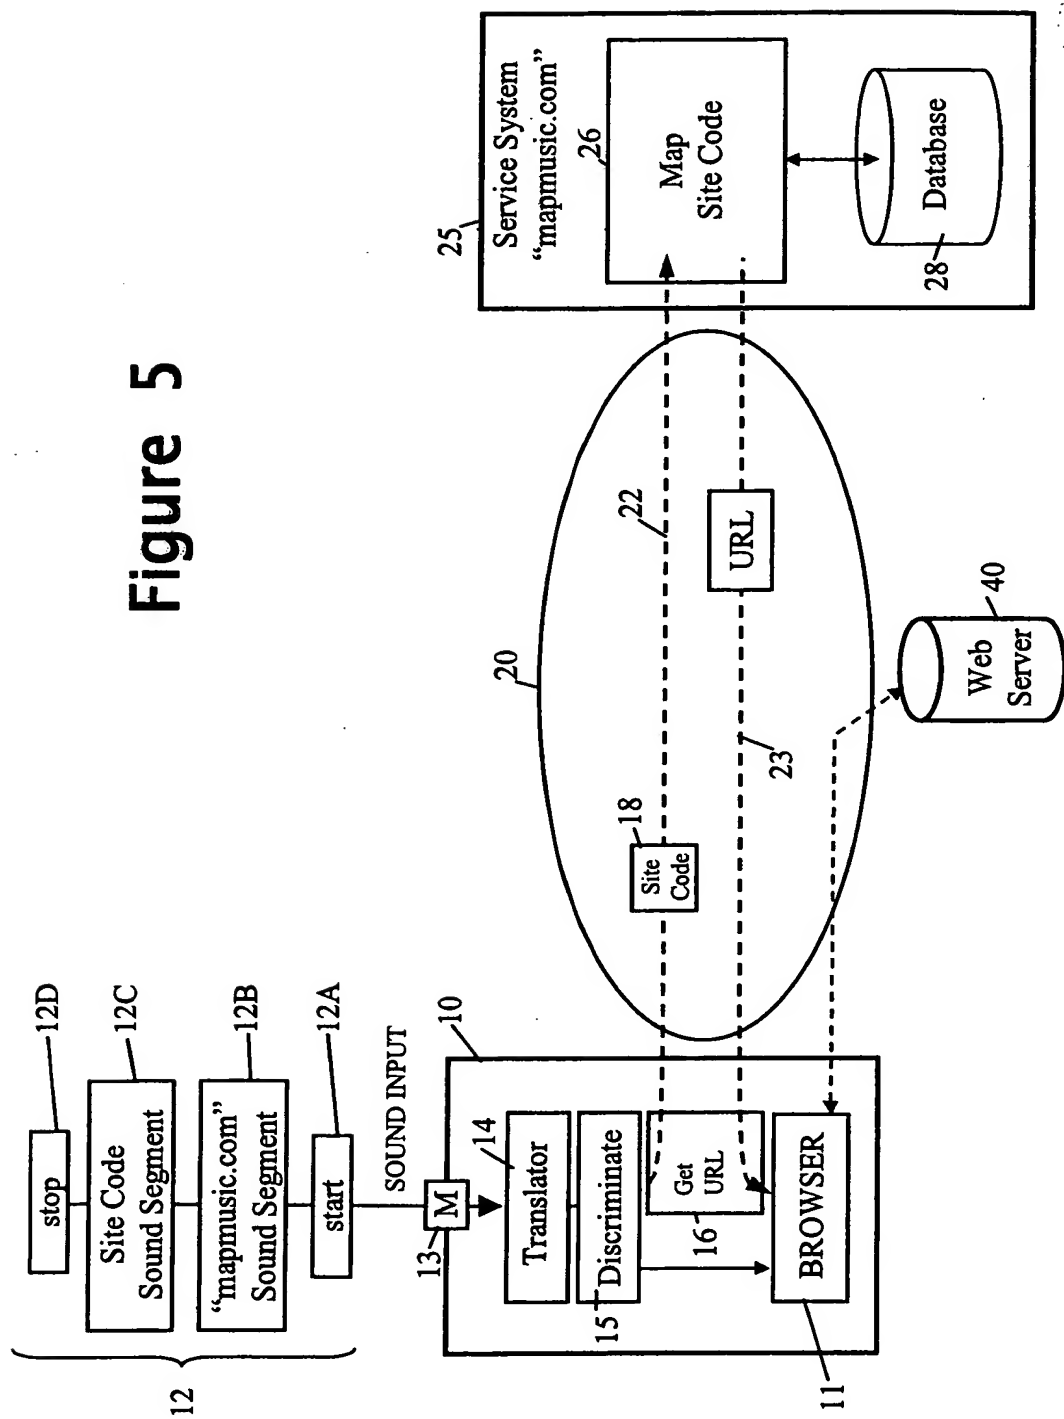

THIS PAGE BLANK (USPTO)

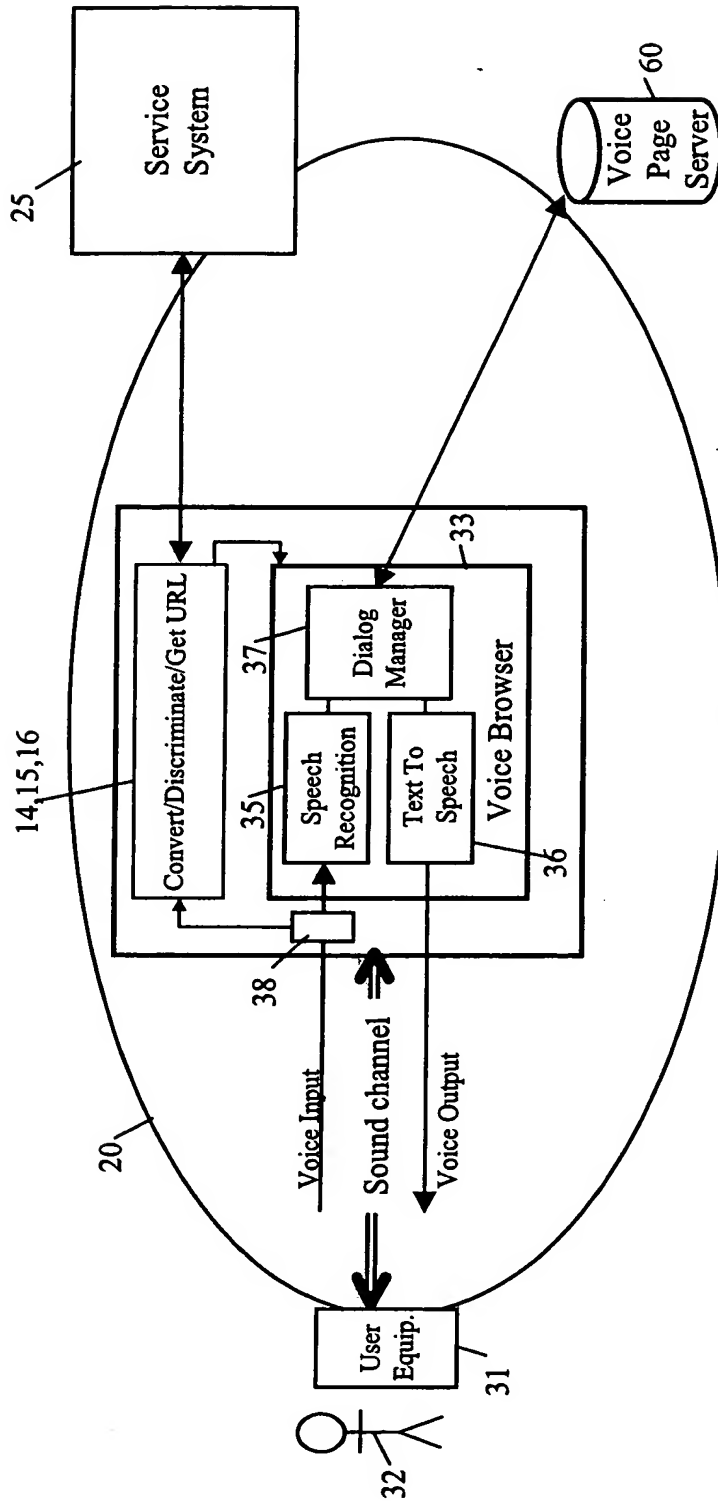


Figure 6

THIS PAGE BLANK (USPTO)